

10.4" marine monitor

Panel mount (Flush Mount) MP-10.4



The 10.4" rugged marine panel mount (Flush Mount) monitor is specially engineered to survive from the most demanding working environment.

The front-mounted sunlight readable touch screen makes the industrial rugged marine monitor vividly and user-friendly. In addition, the high power efficiency and low heat design guarantee the stability and longevity required for mission critical deployment.

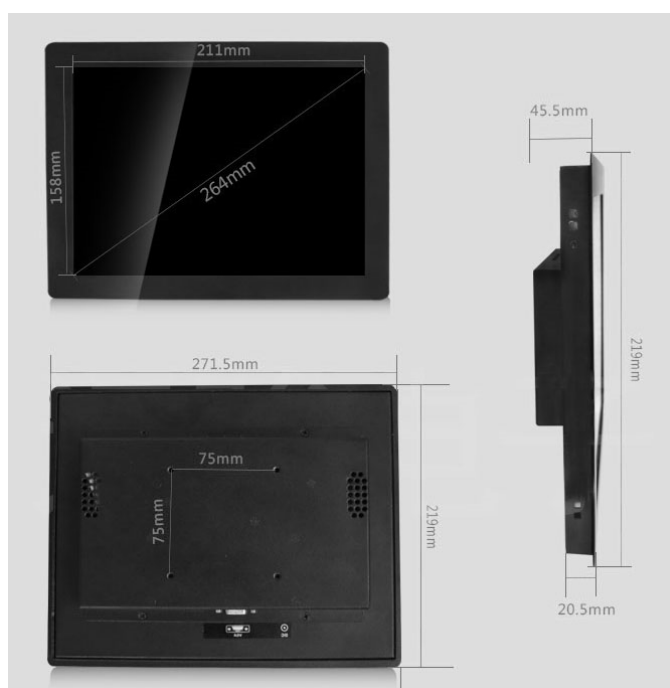
Features:

- 1000 nits Sunlight Readable LCD(0 - 100% Brightness adjustment)
- IP65 waterproof front side
- High bright 1000 NIT Low Power LED Backlights
- Sunlight Readable (optical bond & AR enhancements)
- Rugged Light Weight steel or aluminum Chassis
- High Shock & Vibration Resistance
- Protective Marine/Vehicle Power Supply
- Long Life, Low Power Consumption LED Backlight
- Wide Operating Temperature
- Advanced Optical Bonding (AOT)
- High Shock & Vibration Resistance
- Application: Marine

Specification:

| | |
|-------------------------|---|
| Size | 10.4" |
| Model | MP-10.4 |
| Aspect Ratio | 4:3 |
| Resolution | 800 x 600 |
| Response Time | 12 ms |
| Viewing area(mm) | 158 x 211 |
| Viewing Angle | 140 (H), 140(V) |
| Contrast Ratio | 800:1 |
| Brightness | 1000 nits with deep diming (250nits for optional) |
| Touchscreen | Standard type no touch (Glass protection for front side) Options: resistance or capacitance touch screen (USB/RS232) |
| IP Rating | IP65 for front side |

| | |
|--------------------------|---|
| Video Inputs | 1 x VGA Options: DVI,HDMI,AV |
| Power consumption | 12V DC 15W Options: 8 to 36V DC or 100~240V AC |
| Control Buttons | Manual Brightness controlling and OSD menu in backside(with Power, Menu, Adjust +/- on back) |
| Mounting | Panel mount (Flush Mount) and VESA 75mm mount |
| Temperature | Operating -20 to 60C Storage -30 to 80C |
| Unit Weight(kg) | 2.8 |
| Dimensions(mm) | 219 x 271 x 45.5 |

Dimension:**Installation:**