

15" marine monitor

Panel mount (Flush Mount) MP-15



The 15" rugged marine panel mount (Flush Mount) monitor is specially engineered to survive from the most demanding working environment.

The front-mounted sunlight readable touch screen makes the industrial rugged marine monitor vividly and user-friendly. In addition, the high power efficiency and low heat design guarantee the stability and longevity required for mission critical deployment.

Features:


- 1000 nits Sunlight Readable LCD(0 - 100% Brightness adjustment)
- IP65 waterproof front side
- High bright 1000 NIT Low Power LED Backlights
- Sunlight Readable (optical bond & AR enhancements)
- Rugged Light Weight steel or aluminum Chassis
- High Shock & Vibration Resistance
- Protective Marine/Vehicle Power Supply
- Long Life, Low Power Consumption LED Backlight
- Wide Operating Temperature
- Advanced Optical Bonding (AOT)
- High Shock & Vibration Resistance
- Application: Marine

Specification:

Size	15"
Model	MP-15
Aspect Ratio	4:3
Resolution	1024 x 768
Response Time	12 ms
Viewing area(mm)	228.1 x 304.1
Viewing Angle	160 (H), 160(V)
Contrast Ratio	1000:1
Brightness	1000 nits with deep diming (250nits for optional)
Touchscreen	Standard type no touch (Glass protection for front side) Options: resistance or capacitance touch screen (USB/RS232)
IP Rating	IP65 for front side

Video Inputs	1 x VGA Options: DVI,HDMI,AV
Power consumption	12V DC 25W Options: 8 to 36V DC or 100~240V AC
Control Buttons	Manual Brightness controlling and OSD menu in backside(with Power, Menu, Adjust +/- on back)
Mounting	Panel mount (Flush Mount) and VESA 75mm mount
Temperature	Operating -20 to 60C Storage -30 to 80C
Unit Weight(kg)	4
Dimensions(mm)	287 x 364 x 45.5

Dimension:

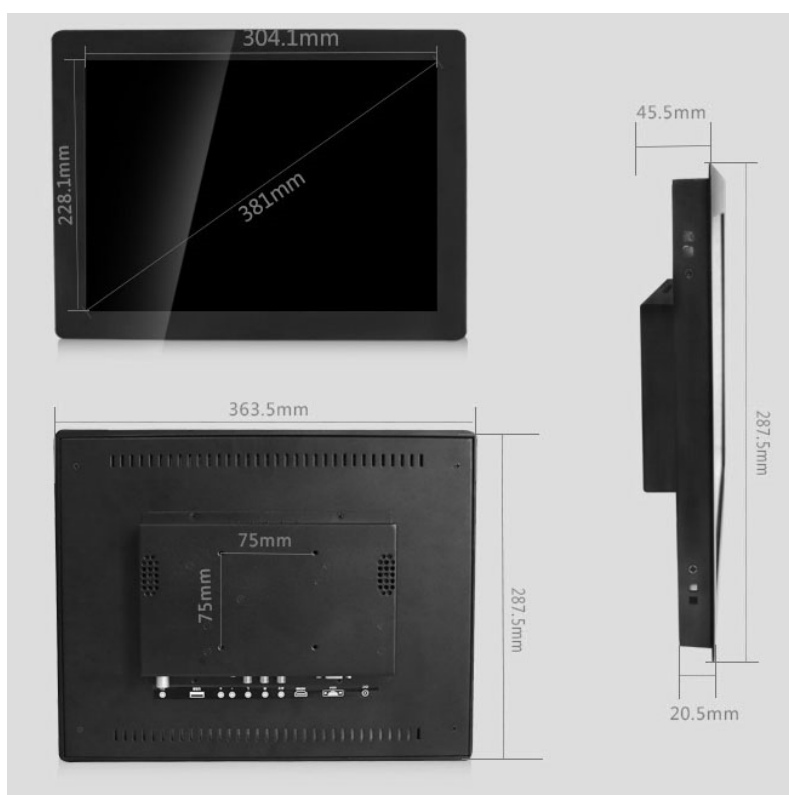

Installation:

